

Multi-hop driver-parcel matching problem with time windows

Wenyi Chen, Martijn Mes, Marco Schutten

Beta Working Paper series 507

BETA publicatie	WP 507 (working paper)
ISBN	
ISSN	
NUR	804
Eindhoven	April 2016

Multi-hop driver-parcel matching problem with time windows

Wenyi Chen*, Martijn Mes, Marco Schutten

University of Twente, Department of Industrial Engineering and Business Information Systems, The Netherlands

Abstract

Crowdsourced shipping can result in significant economic and social benefits. For a shipping company, it has a potential cost advantage and creates opportunities for faster deliveries. For the society, it can provide desirable results by reducing congestion and air pollution. Despite the great potential, crowdsourced shipping is not well studied. With the aim of using the spare capacities along the existing transportation flows of the crowd to deliver small-to-medium freight volumes, this paper defines the multi-driver multi-parcel matching problem and proposes a general ILP formulation, which incorporates drivers' maximum detour, capacity limits, and the option of transferring parcels between drivers. Due to the high computational complexity, we develop two heuristics to solve the problem. The numerical study shows that crowdsourced shipping can be an economic viable and sustainable option, depending on the spatial characteristics of the network and drivers' schedules. Furthermore, the added benefits increase with an increasing number of participating drivers and parcels.

Key words: crowdsourced shipping; pickup and delivery problem; multi-hop; ridesharing; transfers

1. Introduction

E-commerce currently appears to be one of the fastest growing marketing channels for different kinds of products and services for consumers. Online sales of goods in the European Union amounted to approximately 200 billion euros (B2C only) in 2014 and may double in the next five years with annual growth rates above 15% per year (Prologis, 2015), which has resulted in a rapid growth in parcel delivery. With the growth of e-commerce in distribution channels, deliveries will likely become more fragmented than ever with a large number of small-to-medium packages that need to be delivered to customer's locations rapidly (Fatnassi et al., 2015). Although a "last-mile" delivery service is convenient for the customer, it creates significant logistical challenges for shipping companies, one of which is the allocation of large load capacity to address small volume demands (Montreuil, 2011). A larger fleet size increases congestion and environmental problems in urban areas. The INRIX Traffic Scorecard Annual report shows that countries with strong economic growth in 2014, such as the US, Germany, Ireland, Switzerland and Luxembourg, all experienced increased gridlock on their roads. In

* Corresponding author, Tel.: + 31 53 489 5991, E-mail: w.chen-5@utwente.nl

the US, for instance, 6.9 billion hours of US drivers' extra time and 3.1 billion gallons of fuel, which is approximately 160 billion US dollars, are wasted in traffic congestion (Schrank et al., 2015). The road transport sector also plays an important role in world energy use and emissions of greenhouse gases. Up to 30-40% of road sector CO₂ emissions come from road freight transport (ITF, 2010; IPCC, 2014).

As a result of the ever-growing conflict between the increasing demand for mobility and limited resources, shared transport practice has gained a lot of attention recently. It focuses on making joint use of transport resources, between passengers and goods flows. Trentini and Mahl  n   (2010) provide an overview of solutions for combining passenger and freight transportation used in practice. Large retailers such as Walmart and Amazon are also considering crowdsourced parcel services (Barr and Wohl, 2013; Reilly, 2015). As shared economy is increasingly in the spotlight, related strategic and operational aspects of providing integrated transportation services for both people and freight have received academic attention. Several attempts to develop such integrated models have been made. Li et al. (2014) and Nguyen et al. (2015) consider problems in which people and parcels are handled in an integrated way by the same taxi network. Ghilas et al. (2013) study the possibility of transporting freight by public transport, which operates according to predetermined routes and schedules. Similarly, Masson et al. (2014) design a two-tier distribution system that uses spare capacity of the buses combined with a fleet of near-zero emission city freighters to deliver parcels to shops and administrations located in congested city cores. In addition, Fatnassi et al. (2015) investigate the potential of integrating a shared goods and passengers on-demand rapid transit system in urban areas. Presumably due to the computational complexity, the prevailing literature focuses on the driver-parcel matching problems where parcels cannot hop (be transferred) between drivers. Our research fills this gap and explores People and Freight Integrated Transportation (PFIT) problems with the consideration of multiple hops. As a result, drivers and parcels can be matched without requirements of sharing a similar destination or parcel destination that are positioned on or near the driver's route. Instead, parcels can move towards their destination one hop at a time. The multi-hop principle makes our approach suitable for instances with longer distances, such as intercity transportation.

From the standpoint of a shipping company (or a consortium of shippers), this paper considers a problem where the shipper provides freight transportation services via a pool of approved drivers with spare capacity. This crowdsource business setting has a potential cost advantage because thousands of drivers are commuting between home and businesses with spare space in their cars, and those drivers pay for their own cars, gas, insurance, and maintenance. It also creates opportunities for faster deliveries and thus enhances customer satisfaction. Traditionally, for a shipping company's

business-to-customer (B2C) model to be profitable, a critical mass of customers need to be engaged for the provision of the service. Having the crowd as potential means, the time and effort necessary for arranging economically sustainable delivery may be substantially less. From a social standpoint, it can provide desirable results by reducing congestion and air pollution. The key idea to achieve these advantages is to exploit unused capacities along the existing transportation flows of the crowd. Although it is out of the scope of this paper, we would like to point out that crowdsourced shipping can also be used to provide peer-to-peer (P2P) delivery, as seen recently with examples as Deliv, Walmart and Amazon. Such a delivery platform is considered by Arslan et al. (2016). We would also like to comment on the environmental and social benefits of crowdsourced shipping. Without the condition of using the existing vehicle flows, such services (e.g., Uber) may also induce unnecessary travels and thus do not necessarily reduce congestion and air pollution.

The goal of this paper is to provide the means for a shipping company (or a consortium of shippers) to match its demand for freight transportation with people transportation with a particular focus on using spare capacities of the existing private vehicle flows with the objective to minimize the total cost of delivering all the parcels on time. To achieve this goal, we present a mixed integer programming formulation for matching and scheduling such a combined system. Considering the combination with existing planned routes of the drivers, we limit our attention to the offline problem: given all drivers and known delivery requests (i.e., origin, destination, earliest departure time and latest arrival time), find an optimal plan to deliver all the parcels on time, ignoring possible future request. In contrast to P2P platforms where users usually expect a direct response, we focus on periodic planning to benefit from resource consolidation, which makes sense from a shipper’s perspective. The offline setting enables us to batch incoming requests smartly and facilitates the multi-driver multi-parcel matching. Even a driver with a completely different destination can take the parcel to an intersection where the parcel could be transferred to other vehicles that travel closer to the destination. Furthermore, we provide two heuristics for solving non-trivial problem instances of the considered NP-hard optimization problem, which are the time compatibility based heuristic and the time expanded graph based heuristic. These heuristics use different approaches to handle timetable information of the drivers. As a result, they deviate from the exact solution approach due to the consideration of different solution spaces and also require different levels of computational efforts. In this paper, we explain the pros and cons of both heuristics and provide an extensive experimental comparison of the two approaches.

The remainder of the paper is organized as follows. In the next section, we position our research in the context of the relevant literature. After introducing the Multi-Driver Multi-Parcel Matching

Problem (MDMPMP) in Section 3, the mixed integer programming formulation is presented in Section 4. We propose two heuristics for solving the MDMPMP in Section 5. Section 6 presents the experimental settings. Section 7 reports the results obtained from extensive computational experiments. The paper ends with concluding remarks in Section 8.

2. Literature review

As far as the application is concerned, the design and planning of the driver-parcel matching problem described in this paper falls into the field of People and Freight Integrated Transportation problems (PFIT problems). Despite the increasing interest in practice, an integrated people and freight transport solution to short-haul (intra and intercity) transportation has not been sufficiently taken into consideration in the literature (Lindholm and Behrends, 2012; Ghilas et al., 2013). Three ways of integration (i.e., public transport, taxi, and private vehicles) are proposed in the literature. We subsequently discuss each of them in the following paragraphs.

Public transport, such as bus, train, metro and other light rail systems, operates according to predetermined routes and schedules. Ghilas et al. (2013) investigate the opportunity of making use of available public transport as a part of the freight journey of logistics service providers, which operates according to predetermined routes and schedules. An arc-based mixed integer program is presented and it is amenable to solve by CPLEX. The numerical analysis shows significant reductions in operating cost and carbon dioxide emission and the potential for mitigating traffic congestion. Along the same vein, Shen et al. (2015) conduct a case study on the Yuantong Express, one of the major national logistics enterprises in China, to explore the feasibility of the proposed public transit-based freight system using the existing bus network in Zhenjiang City in China. Such an integrated system results in a significant reduction in the fleet size required for good delivery service. Masson et al. (2014) designs a two-tiered distribution system that uses the buses spare capacity combined with a fleet of near-zero emissions city freighters to deliver parcels to shops and administrations located in congested city cores.

A taxi carries passengers and(or) parcels between locations of their choice, which differs from the abovementioned modes of public transport where the pick-up and drop-off locations as well as the schedules are determined by the service provider. Li et al. (2014) propose to integrate parcel transportation into a taxi service, which is defined as the Share-A-Ride Problem, an extension of the dial-a-ride problem. For the sake of reducing the computational complexity, they also propose a method to optimize the insertion of parcel requests into the predefined taxi routes. Nguyen et al. (2015) builds upon the model from Li et al. (2014) and conduct a case study on the Tokyo-Musen

Taxi company in Tokyo city. Typically, a taxi driver has to comply with the service levels for both the passenger and the parcels. In common practice, parcel deliveries should not interfere with passenger transport, the core business of running a taxi.

When it comes to private vehicles, drivers have absolute control of the routes and schedules, and parcels can never travel without a driver. A closely related work by Arslan et al. (2016) studies the incorporation of crowdshipping into the last-mile delivery system within an urban area. The differentiating feature of our work is the consideration of transfers, which makes our approach typically more suitable for instances with longer distances, e.g., transport between urban areas. To support this, we have to make sure that parcels are not left unattended due to the presence of transfers. These requirements strengthen the interdependency between drivers and parcels.

Methodologically, our research belongs to the family of ride-sharing problems, and more specially the multiple driver, multiple rider arrangement (Agatz et al., 2012). Gruebele (2008) describes such multi-hop and multi-passenger routing system in detail. Herbawi and Weber (2011) consider a single rider version of the multi-hop ride-sharing problem where drivers do not deviate from their routes and schedules. As such, the set of drivers' routes form the transportation network for the rider who aims at minimizing time, cost and number of transfers. The problem is modeled as a multi-objective shortest path problem on a time-expanded graph representing the drivers' offers. They propose an evolutionary multi-objective route planning algorithm to solve the problem and show that this approach can provide good quality solutions in reasonable runtime. The multi-hop ride-sharing problem is a lot more difficult when also considering the routing of the drivers (Agatz et al., 2012). Herbawi and Weber (2012) extend the previous work to match multiple riders with multiple drivers having time windows and allowing a possible detour from their routes. They propose a genetic algorithm and show that it can be used to solve the model in reasonable time. Drews and Luxen (2013) show that the problem studied by Herbawi and Weber (2012) can also be solved by exploiting time-expanded graphs representing the drivers' offers. In this paper, we consider a problem with (i) multiple drivers, (ii) multiple parcels, (iii) time windows, (iv) the routing of the drivers, and (v) multiple hops of the parcels. Additional complexity is introduced in our problem due to the requirement of keeping parcels attended all the time.

The contribution of this paper is multi-fold. First, we provide one of the earliest modeling efforts on matching the demand for freight transportation with people transportation by utilizing spare capacities of the existing private vehicle flows. Second, we consider the possibility of transfers, which makes our approach suitable for instances with longer distances. Third, we show that the proposed model can be solved by two very distinct heuristics and provide a comprehensive comparison of the pros and cons of using them.

3. Problem description

As e-commerce grows and evolves, shipping companies need to deliver a large number of small-to-medium freight volumes and home deliveries every day while thousands of drivers are commuting between home and businesses with spare space in their cars. To reduce shipping costs and efforts, shipping companies consider to pay these independent drivers to deliver the parcels for them on the way. To accommodate the parcels, the driver has to make a detour and make extra stops. The length of the detour and the number of extra stops are determined by the driver's willingness to extend his trip with respect to both distance and time. Drivers may take a single parcel or multiple parcels (sequentially or simultaneously) along the journey, as long as the capacity of their vehicle is not exceeded. Similarly, parcels may be carried by a single driver from their origins to their destinations or may be transported by multiple drivers and transferred from one to another en route to their destinations. We propose the Multi-Driver Multi-Parcel Matching Problem (MDMPMP) based on the Multi-Hop Ride Sharing Problem.

The MDMPMP is defined on an undirected graph $G = (N, E)$, where N is the set of nodes representing the possible locations for departure, arrival or transfer, and E is the set of edges that directly connect two aforementioned locations, i.e., represents the road network. With each edge $(i, j) \in E$, a distance d_{ij} and a travel time t_{ij} are associated. Furthermore, we are given a set of drivers Q and a set of parcels P . Driver $q \in Q$ will travel from his origin o_q^Q to his destination w_q^Q and SP_q represents the set of edges belonging to his shortest path from o_q^Q to w_q^Q . An earliest time E_q^Q at which he can depart from his origin o_q^Q and a latest time L_q^Q at which he has to arrive at his destination w_q^Q are also associated with driver q . Driver q has V_q spare space available for parcels. Similarly, each parcel $p \in P$ will travel from its origin o_p^P to its destination w_p^P . An earliest time E_p^P at which it can depart from its origin o_p^P and a latest time L_p^P at which it has to arrive at its destination w_p^P are also associated with parcel p . Each parcel has a volume of v_p .

To cope with realistic requirements, our model has the following features. First, drivers are allowed to deviate from their shortest path to pick up and drop off parcels, as long as their detour is at most a fraction δ of their shortest path length, and thus the routing of the drivers also need to be considered. Second, parcels are not allowed to be left unattended. As a result, the waiting time of the driver who needs to handover the parcel at a certain station (and thus the subsequent possible paths) depends on the arrival time of the following driver, and so on. Third, parcels are not as time sensitive as riders in the ride sharing problem, as long as they are delivered within the associated time windows. Therefore, assigning longer paths to the parcels may facilitate the system-wide matching. To avoid making too many unnecessary transfers, parcels are not allowed to pass the same node more than

once in our model. From an algorithmic viewpoint, the first two features make the assignment of parcels to drivers more complicated because the validation of the possible paths for different drivers are intertwined.

While it costs the shipping company c_p to deliver parcel p itself, it can also let the crowd do it by paying them a compensation for the service. Our goal is to help the shipper deliver all the parcels on time with minimum overall cost, which consists of (i) the shipping costs, and (ii) the compensation for drivers' traveling cost and inconvenience due to the parcel delivery.

4. Mathematical model for the MDMPMP

In this section, we present a mixed-integer program for the MDMPMP from a shipping company's perspective. Table 1 lists all the relevant parameters and variables used. With this model, the shipping company can determine (i) the optimal matching plan between drivers and parcels for the whole planning horizon (e.g., one day), (ii) the optimal path of each driver and each parcel, and (iii) the time schedule for the drivers and the parcels to be delivered by independent drivers. Depending on the availability of the drivers, many parcels might still need to be delivered by the shipper itself (see numerical results from Section 7). The driver-parcel matching requires a seamless coordination among drivers, parcels, and the freight transportation network, which motivated us to design this MDMPMP model.

The objective is to minimize the overall cost of the shipping company related to the parcel delivery service, which consists of the shipping cost incurred from self delivery and the four weighted costs of compensating the crowd. The compensation includes (i) the transportation cost compensation for the kilometers that the drivers travel with parcels, (ii) the risk and inconvenience associated with the number of parcel transfers, (iii) the waiting time for transferring parcels, and (iv) the extra kilometers traveled. The last two components are the compensation for the system-wide opportunity costs incurred by all the drivers due to the parcel delivery. Accordingly, the objective function in our formulation of the MDMPMP is written as follows. Each of the five terms has a weight attached.

Table 1 Parameters and decision variables for the MDMPMP model.

Parameters	
Q	Set of drivers
P	Set of parcels
N	Set of nodes
E	Set of edges
o_q^Q	driver q 's origin
w_q^Q	driver q 's destination
o_p^P	parcel p 's origin
w_p^P	parcel p 's destination
SP_q	Set of edges belonging to the shortest path of driver q from o_q^Q to w_q^Q
E_q^Q	Earliest departure time of driver q
L_q^Q	Latest arrival time of driver q
r_q	Distance of the shortest path from o_q^Q to w_q^Q of driver q
δ	Coefficient of maximum detour
x_{qij}	Binary parameters equal to 1 if edge (i, j) belongs to the set of paths of driver q , the length of which is no more than $(1 + \delta)r_q$; and 0 otherwise
E_p^P	Earliest departure time of parcel p
L_p^P	Latest arrival time of parcel p
V_q	Available car capacity of driver q
v_p	Volume of parcel p
d_{ij}	Travel distance from node i to node j , $\forall i, j \in N$
t_{ij}	Travel time from node i to node j , $\forall i, j \in N$
c_p	Cost of delivering parcel p by the shipping company
w_1	Compensation per parcel per kilometer for a driver who help carry freight
w_2	Cost of transferring a parcel between drivers
w_3	Compensation per minute for a driver waiting on the way
w_4	Compensation per kilometer for a driver's additional travel cost due to detour
M, K	Large numbers
Decision variables	
Z_{qij}	Binary variable equal to 1 if driver q goes directly from node i to node j ; and 0 otherwise
Y_{pqij}	Binary variable equal to 1 if driver q carries parcel p from node i to node j ; and 0 otherwise
W_p	Binary variable equal to 1 if parcel p is delivered by the shipping company
D_{qi}^Q	Departure time of driver q at node i
D_{pi}^P	Departure time of parcel p at node i
Dependent variables	
S_{pqi}	Binary variable equal to 1 if driver q picks up parcel p at node i
A_{qi}^Q	Arrival time of driver q at node i
A_{pi}^P	Arrival time of parcel p at node i
y_{pj}	Binary variable for logic constraints that are used to ensure that parcels are not left unattended

$$\begin{aligned}
\min \quad & \sum_p c_p W_p + w_1 \sum_q \sum_p \sum_{i,j} d_{ij} Y_{pqij} + w_2 \sum_p \sum_q \sum_{i \neq o_p^P} S_{pqi} \\
& + w_3 \sum_q \left((A_{q,w_q^Q}^Q - D_{q,o_q^Q}^Q) - \sum_{i,j} t_{ij} Z_{qij} \right) \\
& + w_4 \sum_q \left(\sum_{i,j} d_{ij} Z_{qij} - r_q \right) \tag{1}
\end{aligned}$$

The MDMPMP is confined by two sets of constraints: (i) spatial constraints and (ii) capacity and time constraints.

Constraints for spatial issues

$$\sum_j Z_{qij} = 1 \quad \forall q, i = o_q^Q \tag{2}$$

$$\sum_i Z_{qij} - \sum_k Z_{qjk} = 0 \quad \forall q, \forall j \in N \setminus \{o_q^Q, w_q^Q\} \tag{3}$$

$$\sum_i Z_{qij} = 0 \quad \forall q, j = o_q^Q \tag{4}$$

$$\sum_i Z_{qij} \leq 1 \quad \forall q, j \tag{5}$$

$$Z_{qij} \leq x_{qij} \quad \forall q, i, j \tag{6}$$

$$\sum_{i,j} d_{ij} Z_{qij} \leq r_q (1 + \delta) \quad \forall q \tag{7}$$

$$\sum_q \sum_j Y_{pqij} + W_p = 1 \quad \forall p, i = o_p^P \tag{8}$$

$$\sum_i \sum_q Y_{pqij} - \sum_q \sum_k Y_{pqjk} = 0 \quad \forall p, \forall j \in N \setminus \{o_p^P, w_p^P\} \tag{9}$$

$$\sum_q \sum_i Y_{pqij} = 0 \quad \forall p, j = o_p^P \tag{10}$$

$$Y_{pqij} \leq Z_{qij} \quad \forall p, q, i, j \tag{11}$$

$$S_{pqj} \geq \sum_i Y_{pqji} - \sum_i Y_{pqij} \quad \forall p, q, j \tag{12}$$

$$Z_{qij}, Y_{pqij}, W_p, S_{pqi} \in \{0, 1\} \quad \forall p, q, i, j \tag{13}$$

Constraints (2)-(13) are imposed to find the feasible matches between drivers and parcels based on the spatial information (i.e., origins and destinations). Constraints (2) and (3) ensure that each driver will take one and only one path, and this path is continuous. Constraints (4) ensure that no driver will return to his/her origin. Constraints (5) prevent the drivers returning to already visited nodes. Constraints (6) guarantee that drivers only use edges of paths that comply with the maximum detour constraint. Constraints (7) are the maximum detour constraint for the drivers. By constraints (8) and (9), each parcel will be delivered from origin to destination either by drivers or by the shipping company itself. Constraints (10) ensure that no parcel will return to its origin. Constraints (11)

ensure that the parcels that are scheduled to be delivered by drivers cannot travel without a driver. Constraints (12) keep track of the stations where parcels are picked up by drivers. Constraints (13) are domain constraints.

Constraints for capacity and time related issues

$$\sum v_p Y_{pqij} \leq V_q \quad \forall q, i, j \quad (14)$$

$$A_{qi}^Q \geq D_{qi}^Q + t_{ij} - M(1 - Z_{qij}) \quad \forall q, \forall i \in N \setminus \{w_q^Q\}, \forall j \in N \setminus \{o_p^P\} \quad (15)$$

$$D_{pi}^P \geq E_p^P(1 - W_p) \quad i = o_p^P, \forall p \quad (16)$$

$$A_{pj}^P \leq L_p^P(1 - W_p) \quad j = w_p^P, \forall p \quad (17)$$

$$D_{pi}^P \geq A_{pi}^P \quad \forall i \in N \setminus \{o_p^P, w_p^P\}, \forall p \quad (18)$$

$$D_{qi}^Q \geq E_q^Q \quad i = o_q^Q, \forall q \quad (19)$$

$$A_{qj}^Q \leq L_q^Q \quad j = w_q^Q, \forall q \quad (20)$$

$$D_{qi}^Q \geq A_{qi}^Q \quad \forall i \in N \setminus \{o_p^P, w_p^P\}, \forall q \quad (21)$$

$$D_{pi}^P - D_{qi}^Q \leq M(1 - \sum_j Y_{pqij}) \quad \forall p, q, \forall i \in N \setminus \{w_p^P, w_q^Q\} \quad (22)$$

$$D_{pi}^P - D_{qi}^Q \geq -M(1 - \sum_j Y_{pqij}) \quad \forall p, q, \forall i \in N \setminus \{w_p^P, w_q^Q\} \quad (23)$$

$$A_{qi}^Q - A_{pi}^P \leq M(1 - \sum_j Y_{pqji}) \quad \forall p, q, \forall i \in N \setminus \{o_p^P, o_q^Q\} \quad (24)$$

$$A_{qi}^Q - A_{pi}^P \geq -M(1 - \sum_j Y_{pqji}) \quad \forall p, q, \forall i \in N \setminus \{o_p^P, o_q^Q\} \quad (25)$$

$$D_{qj}^Q - D_{pj}^P \geq -M(1 - \sum_i Y_{pqij}) - y_{pj}K \quad \forall p, q, \forall j \in N \setminus \{w_p^P, w_q^Q\} \quad (26)$$

$$A_{qj}^Q - D_{pj}^P \geq -M(1 - \sum_i Y_{pqij}) - y_{pj}K \quad j = w_q^Q, \forall p, q \quad (27)$$

$$A_{pj}^P - A_{rj}^Q \geq -M(1 - \sum_k Y_{prjk}) - K(1 - y_{pj}) \quad \forall q, r \in Q, \forall p, \forall j \in N \setminus \{w_p^P, w_r^Q\} \quad (28)$$

$$D_{qi}^Q, D_{pi}^P, A_{qi}^Q, A_{pi}^P \geq 0 \quad \forall q, p, i \quad (29)$$

$$y_{pj} \in \{0, 1\} \quad \forall p, j \quad (30)$$

Constraints (14)-(33) concern the capacity and time related issues. Constraints (14) are capacity constraints for the drivers. Constraints (15) calculate the arrival times of drivers based on the associated departure times. Constraints (16) and (17) ensure that each parcel that is to be delivered by the crowd departs after the corresponding earliest departure time and arrives before the corresponding latest arrival time. Clearly, the departure time cannot be earlier than the arrival time at the same station, which is considered by Constraints (18). Similarly, the time compatibility issues for the drivers are enforced by Constraints (19)-(21). Constraints (22) and (23) ensure that the departure time of a parcel equals the departure time of the driver who will carry it. Constraints (24) and (25)

guarantee that the arrival time of a parcel equals the departure time of the driver who will carry it. Thus, Constraints (22)-(25) ensure the time consistency of a parcel and all the drivers carrying it. Constraints (26) ensure that the departure time of the driver who brought the parcel to a particular node is no earlier than the departure time of the parcel. Constraints (27) deal with the boundary situation of Constraints (26) that the driver who has arrived at his destination with a parcel has to stay until the parcel departs again. Constraints (28) guarantee that the arrival time of the driver who will carry the parcel arrives earlier than the parcel. If $y = 0$, then only Constraints (26) and (27) hold, and if $y_{pj} = 1$ then only Constraints (28) hold. This either/or behavior ensures that parcels are never left unattended. Constraints (29) and (30) are domain constraints.

Valid inequalities

In addition, we add the following valid inequalities to the model that help us find the solution. Although these five sets of constraints are not necessary, the scenarios we tested show that they can reduce the run time by up to 11.6%.

$$\sum_j Z_{qij} = 1 \quad \forall q, j = w_q^Q \quad (31)$$

$$D_{qi}^Q \leq M \sum_j Z_{qij} \quad \forall q, \forall i \in N \setminus \{w_q^Q\} \quad (32)$$

$$A_{qi}^Q \leq M \sum_j Z_{qij} \quad \forall q, \forall i \in N \setminus \{o_q^Q\} \quad (33)$$

$$D_{pi}^P \leq M \sum_q \sum_j Y_{pqij} \quad \forall p, \forall i \in N \setminus \{w_p^P\} \quad (34)$$

$$A_{pi}^P \leq M \sum_q \sum_j Y_{pqij} \quad \forall p, \forall i \in N \setminus \{o_p^P\} \quad (35)$$

Constraints (31) ensure each driver will visit the destination once and only once. Constraints (32)-(35) prevent assigning arrival and departure times to the non-visited nodes of drivers and parcels. In fact, Constraints (6) are also valid inequalities, the purpose of which is to restrict a driver from traveling via the other drivers' possible paths on the subgraph. This set of constraints effectively reduce the actual size of the ILP model.

5. Algorithms

The MDMPMP is an extension of the Share-A-Ride Problem, which is an NP-hard problem. The computational complexity of the MDMPMP motivated us to develop heuristics to efficiently solve the problem. In Section 5.1, we describe the procedure of finding possible routes for drivers given the maximum detour δ . This procedure is used to obtain the x matrices in solving the ILP from Section 4 and to build the subgraph in the time compatibility based heuristic (TC-heuristic) presented in

Section 5.2. The basic idea of the TC-heuristic is to assign each parcel to the shortest feasible path in the subgraph, yet checking the time compatibility on the basis of every assignment. These time compatibility checks can be computationally costly, as the dependency of the assignments increases. In Section 5.3, we propose the time-expanded graph based heuristic (TEG-heuristic), the basic idea of which is to use a more stable structure to model the timetable information.

5.1. Finding possible routes

Taking the maximum detour into account, the goal of this subsection is to find all the possible paths for drivers in terms of travel distance. For any driver q , the shortest path SP_q is found through the unidirectional A* algorithm. Then, a variant of the depth-first search (DFS) strategy is used to enumerate all possible paths that are no longer than the maximum detour, with respect to the shortest path that the driver is willing to take. These possible paths constitute a subgraph of the original graph. Figure 1 provides an illustrative example for two drivers. Figure 1(a) is the original graph with 10 stations, where driver 1 needs to travel from Station 1 to Station 8 and driver 2 needs to travel from Station 1 to Station 9. The number associated with each edge represents the travel distance between the two nodes connected by the edge. Each driver is willing to take a detour of at most 10% of his/her shortest path. There are three options to travel from Station 1 to Station 8, which are $1 \rightarrow 2 \rightarrow 7 \rightarrow 8$, $1 \rightarrow 2 \rightarrow 6 \rightarrow 8$ and $1 \rightarrow 3 \rightarrow 8$, and the corresponding travel distances are 9, 9.5 and 16, respectively. Since the maximum distance driver 1 is willing to travel is $9.9 (= 1.1 \times 9)$, only $1 \rightarrow 2 \rightarrow 7 \rightarrow 8$ and $1 \rightarrow 2 \rightarrow 6 \rightarrow 8$ are possible paths for driver 1. Therefore, we obtain $x_{1,1,2}, x_{1,2,7}, x_{1,7,8}, x_{1,2,6}, x_{1,6,8} = 1$, and 0 for the rest of the elements. Similarly, the only possible path for driver 2 is $1 \rightarrow 4 \rightarrow 5 \rightarrow 9$, and thus $x_{2,1,4}, x_{2,4,5}, x_{2,5,9} = 1$, and 0 for the rest of the elements. Figure 1(b) describes the resulting subgraph for the MDMPMP. This procedure efficiently reduces the size of the problem by removing unnecessary edges.

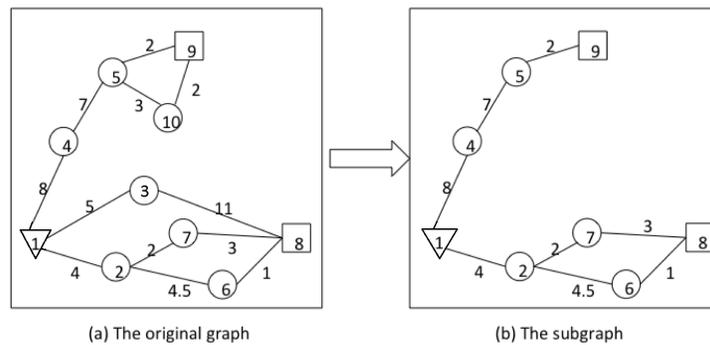


Figure 1 An example of building subgraph

5.2. Time compatibility based heuristic

The basic idea of the TC-heuristic is to assign each parcel to the shortest feasible path on the subgraph described in Section 5.1, where feasibility is based on the time compatibility and capacity availability between the parcel and the associated drivers on the path. For each object (either a parcel or a driver), there exists a time interval associated with a node, a time range between the earliest possible time to arrive at this node from the origin and the latest possible time to depart from this node in order to arrive at the destination on time. Time compatibility refers to the existence of an intersection between the time interval of drivers and parcels, either two drivers or a driver and a parcel. Figure 2 describes the major steps of the TC-heuristic.

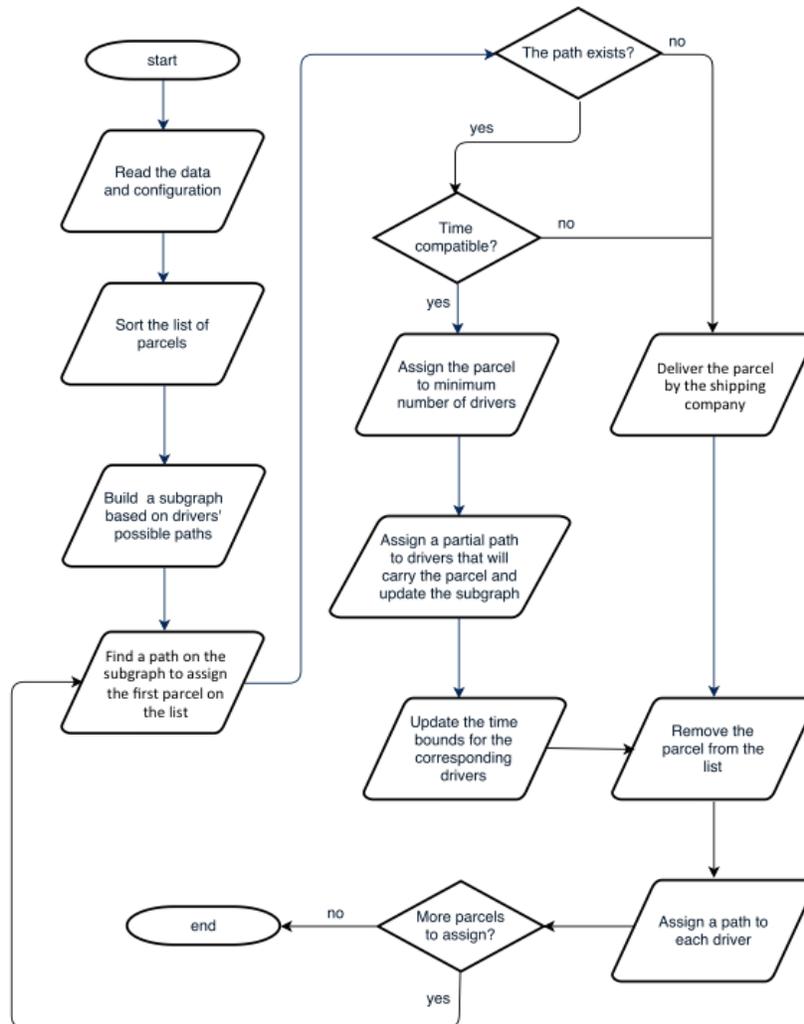


Figure 2 Flowchart of the TC-heuristic

The parcels are sorted in decreasing shipping cost if delivered by the shipping company. As such,

the more costly parcels will have bigger chances of being assigned to the crowd. Having the subgraph built, the TC-heuristic finds the shortest path of each parcel on the subgraph. Finding a physical path through the subgraph is not a sufficient condition for a match. In addition to the car capacity constraints, the time constraints of a parcel must also fit those of the drivers'. The major challenge of this heuristic is how to evaluate the time compatibility issue of a parcel and all the drivers who are assigned to deliver the parcel along the way. To this end, we need to construct time intervals of parcels and drivers on each node.

The TC-heuristic utilizes the bidirectional A* search to solve the shortest paths of parcels. For each step, forward and backward, it checks the time compatibility. The lower-bound of a parcel's time interval in the forward A* search (the upper-bound of a parcel's time interval in the backward A* search) at a node is represented by the earliest arrival time departing from the origin (destination). Since the path from the current node to the sink in each search direction has not been fixed yet, the time needed to travel to the sink is approximated by the time needed if traveling through "airplane distance". As such, the exact value of the upper-bound of a parcel's time interval in the forward A* search (the lower-bound of a parcel's time interval in the backward A* search) can be estimated as above.

To solve the time compatibility issue for drivers, we introduce the concept of the equivalent time interval associated with a driver at a node, which is the possible time interval for the driver if he would pass the node as part of his route. These nodes do not necessary belong to the feasible paths of the driver. In order to become a "time-compatible" node on a parcel path, the intersection of the parcel's time interval and the equivalent time intervals of those drivers who have carried the parcel must be non-empty. Figure 3 provides an illustrative example of the time compatibility check. A parcel (P) is requested to be shipped from Node 1 to Node 4. Drivers 1, 2, 3 and 4 ($D1, D2, D3$, and $D4$) travel from 1 to 5, 2 to 6, 3 to 7, and 3 to 7, respectively. The numbers in italic are inputs and the rest are obtained via calculation. The time intervals of the parcel and the equivalent time intervals associated with the drivers are calculated. The parcel has been carried by $D1$ and $D2$ to Node 3. Spatially, either Driver 3 or Driver 4 can take the parcel from Node 3 to Node 4. By checking the time compatibility at Node 4, $P \cap D1 \cap D2 \cap D3 = \emptyset$ while $P \cap D1 \cap D2 \cap D4 = (240, 250) \neq \emptyset$. Therefore, Node 4 is a time-compatible node associated with $P, D1, D2$ and $D4$. It is important to mention that the arrival time and the departure time at a node are assumed to be equal, which implies that the drivers do not wait after departure.

The time compatibility is checked at each step of the algorithm with approximated values and it is checked with exact values when a path is found. If the final check of a path fails, the algorithm

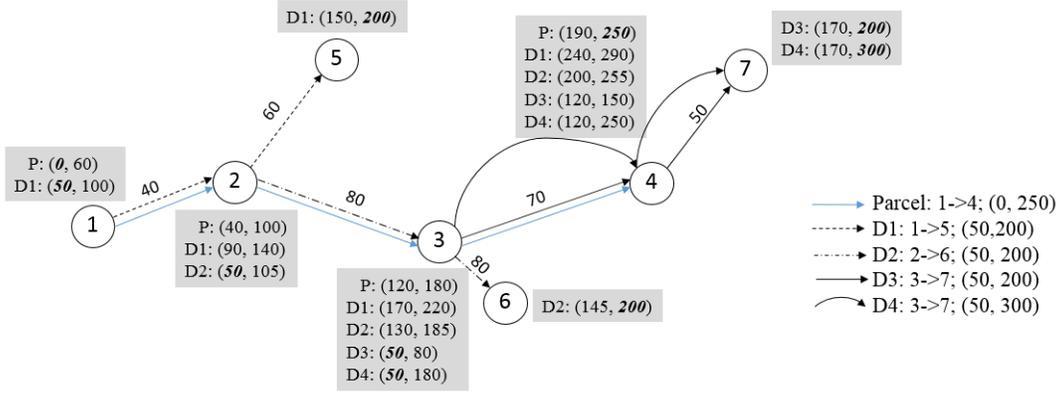


Figure 3 Time compatibility

keeps searching for more paths, and stops when a feasible path is found or all possible paths have been checked. If no feasible path is found, the parcel will be delivered by the shipping company.

5.3. Time-expanded graph based heuristic

The pairwise time compatibility checks in the TC-heuristic might lead to a combinatorial explosion in realistic problems with more potential meeting points and more transfers. The computational complexity of the TC-heuristic motivated us to develop a second heuristic for solving larger-scale problem instances. In particular, we engineer the MDMPMP by exploiting a dynamic time-expanded graph that is typically used in public transportation to model timetable information.

Given the information associated with a driver q (i.e., E_q^Q , L_q^Q , o_q^Q and w_q^Q), we define $l = \{s_1, s_2, t_1, t_2, q\}$ as an offer with $s_1, s_2 \in S, q \in Q, t_1 < t_2, s_1 \neq s_2$, meaning that driver q needs to drive from s_1 to s_2 , departing at the earliest t_1 and arriving at the latest t_2 . Each offer corresponds to a set of possible paths that satisfy this offer. Figure 3 provides an illustration of what an offer is. $D4$ travels from Node 3 to Node 7, and thus his initial offer is $\{3, 7, 50, 300, 4\}$. After Parcel P is assigned to $D4$, he has to go from Node 3 to Node 7 through Node 4 within a certain time window, considering of the schedule of $D1, D2$ and P . Accordingly, his offers are updated as $\{3, 4, 170, 250, 4\}$ and $\{4, 7, 240, 300, 4\}$.

A delivery request contains an origin o_p^P , destination w_p^P , earliest departure time E_p^P , and implicit service window $L_p^P - E_p^P$. The time expanded graph can be defined by time nodes and time edges. A time node is denoted by a triple (n, l, t) , representing this driver's offer l at node n at time t . There exists a time node for every departure or arrival of a driver. Each time edge is associated with a weight that is the travel time. Note that on a TEG, a station node is represented by a set of time nodes, which are sorted according to the time of the event they represent. The time-ordered nodes of a station can be connected by so-called transfer edges that model the waiting within the station. For

the details of this technique we refer to Drews and Luxen (2013). Here, we focus on the differentiating feature of the TEG-heuristic, compared to the typical TEG method.

The proposed TEG-heuristic can be divided into two parts. First, to use the drivers' information to build a TEG based on graph G . Second, to greedily assign parcels to drivers' offers. The critical feature of this approach is that a parcel delivery request is answered by applying some shortest-path algorithm (A* algorithm in our case) to a suitably constructed bigraph (i.e., timetable). As discussed above, parcels may be carried by multiple drivers but cannot be left unattended during the transfer. Hence, either the driver who carries the parcel to the transfer point or the driver who is going to pick up the parcel from there is required to wait. Given that the drivers do not have predetermined routes and schedules, this requirement makes the time that a driver has to spend on each transfer point highly uncertain, not only depending on the path he travels, but also on the path of the driver whom he is going to hand over the parcel to. In order to localize the procedure of finding the possible paths for each driver, we apply a fixed "hold time" to each driver who needs to hand over a parcel. Any transfer that takes longer than the "hold time" is not possible. At a potential price of finding less possible paths, forcing the drivers to wait a "hold time" at each transfer enables us to find the possible paths for each driver by considering only his/her own detour and time constraints, which can be efficiently done by any shortest-path algorithm. As we discuss later on, post-processing can be used to reduce the negative impact of the fixed "hold time". Similar to slotted TEGs, on the other hand, the fixed "hold time" adds some reliability to making transfers and thus reflects arguably more realistic scenarios (Drews and Luxen, 2013). Following this idea, we propose a greedy heuristic that incorporates the TEG procedure for the MDMPMP. Figure 4 describes the major steps of the TEG-heuristic.

The TEG-heuristic simplifies the MDMPMP by letting drivers depart at their earliest departure times. In fact, for the realistic MDMPMP drivers are fine with any postponement of departure as long as they can arrive on time. This discrepancy leads us to develop an improved version of the basic TEG-heuristic, which we call the constrained randomized TEG-heuristic (CR-TEG heuristic). In this algorithm, the initial solution obtained by the TEG-heuristic is then improved by attempting to randomize the departure times of the drivers who have not yet had any parcel assignment. The results are also compared with a fully randomized version (R-TEG heuristic) where we attempt to find the best solution among the independent iterations of the basic TEG-heuristic with randomly generated departure times for all drivers, including those that already have parcels assigned to.

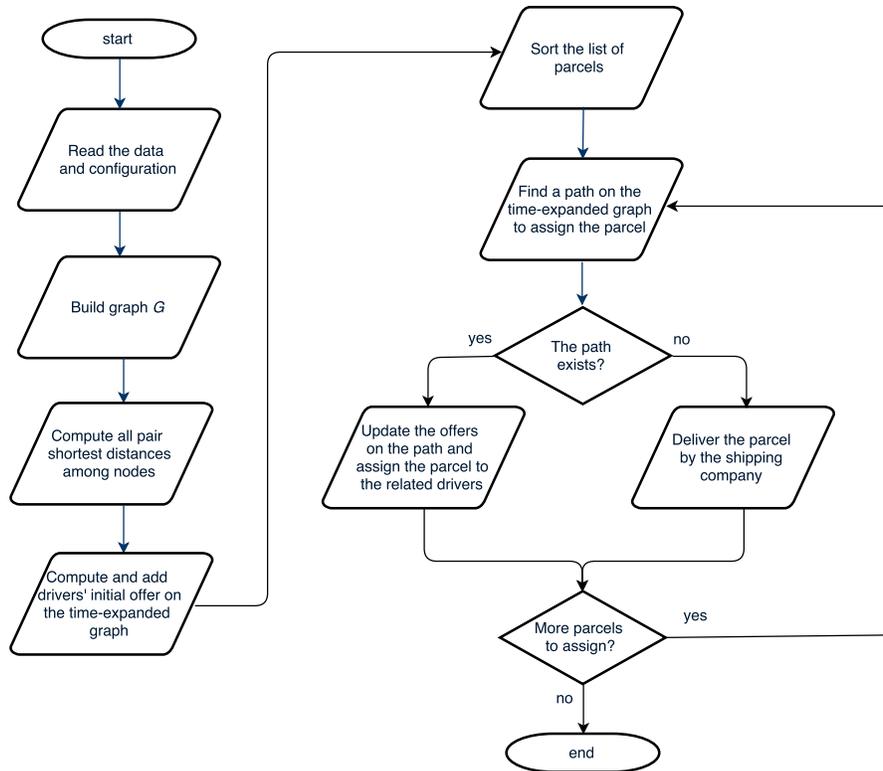


Figure 4 Flowchart of the time expanded graph based heuristic

5.4. Discussion

In the previous subsections, we proposed two very different approaches that solve the MDMPMP as shortest-path problems in weighted graphs. The TC-heuristic applies a routing algorithm in a road network, while the TEG-heuristic utilizes the time-expanded graph approach that is typically used to model timetable information in public transportation where the routes and schedules are usually predetermined. As such, the most differentiating feature of the two approaches is whether the decision on a driver’s route and the corresponding time schedule affects the feasibility of another driver’s decision.

Given that drivers’ timetable information are not modeled explicitly in the TC-heuristic, a driver’s time interval at a node not only depends on the path he travels, but also on the paths of the drivers who previously carried the same parcel. Thus, the pairwise time compatibility has to be checked at every step of the heuristic. Such time compatibility checks can be computational costly. Even worse, the fulfillment of all the checks with approximate values cannot guarantee the feasibility of the candidate path in the final check. Very differently, the TEG-heuristic creates a fixed “hold time” as a buffer between any two consecutive drivers along a parcel’s path in order to localize the procedure of finding possible paths for each driver. At a potential price of finding less possible paths, forcing

the drivers to wait a “hold time” at each transfer enables us to find the possible paths for each driver by considering only his own detour and time constraints.

In order to reduce the computational complexity, The TC- and TEG-heuristics are not designed to consider all the possible paths of each driver. Under the assumption that drivers do not wait after departure, the TC-heuristic loses feasible solutions with transfers that require waiting time, the impact of which is controlled by adjusting the departure time based on the assignment results, and by minimizing the number of drivers assigned to a parcel. The TEG-heuristic loses possible paths in two ways. First, due to the fixed “hold time” at each transfer, drivers’ effective travel time decreases. Second, drivers are assumed to depart at the earliest departure time in the original TEG-heuristic. Although it cannot regain the lost paths, post-processing may improve the objective value of the existing driver-parcel assignments by re-optimizing the time schedule of the given assignment. To this end, we can run the ILP by using the resulting Z_{qij} , Y_{pqij} and W_p from the TEG-heuristic as input. Moreover, these two approaches are greedy algorithms in the sense that they give matching priority to parcels that are more expensive to deliver. As such, the locally optimal assignments eliminate a subset of drivers’ possible paths, which may include the global optimum. In addition, as a starting point, a shortest path algorithm is used by both heuristics as an efficient way to generate possible paths for parcels, which deviates from the fact that parcels are not as time sensitive as people. The heuristics might lead to a better results without this rule. From a different angle, the shipping company may view it as a business opportunity to segment customers by providing even more speedy delivery service.

To summarize, the search spaces of the two heuristics intersect. However, the TC-heuristic tends to be able to generate more possible paths, and thus, it is more likely to find a better solution at the cost of computational effort, especially in small-to-medium instances where number of transfers are rather limited. Considering the potential shortcomings of the TEG-heuristic, we proposed two variants to generate different departure times aiming at mitigating the loss of possible paths, the benefits of which are shown in Section 7.

6. Experimental settings

In this section, the experimental settings are described. Our goal of the numerical experiments is two-fold. First, we present the features of the MDMPMP and the efficiency gain by integrating crowdshipping. Second, we show that our solution methods can obtain high quality solutions in reasonable time.

Three basic factors affect the complexity of the problem: the number of drivers, the number of parcels, and the maximum detour. Two additional factors that affect the behavior of the model are

the spatial distribution of the network and the planning horizon. The experiments reported here are to test the influence of these five factors. The results are analyzed from the standpoints of the shipper, drivers, parcel senders, and the society. From the shipper’s perspective, the most important performance indicator is the total cost spent on delivering all the parcels on time, either by the crowd or by itself. The compensation for drivers relates to the kilometers traveling with parcel(s), the number of parcel transfers, the waiting time during transfer, and the detour distance. Another performance indicator that can show the benefit of our model is the match rate, a ratio between the number of parcels delivered by the crowd and the total number of parcels to be delivered. For drivers, we record the maximum, minimum and mean values of drivers’ extra travel time, as well as the average capacity utilization of a driver’s car. For parcels, the average number of hops is the only performance indicator. In terms of social welfare, we use *the kilometers saved* as an indicator for the reduction of traffic congestion and CO₂ emission. Considering the difficulty in estimating the extent of consolidation for unmatched parcels in practice, we assume that these parcels are delivered by the shipper using a traditional parcel delivery service. As such, this indicator provides an optimistic estimation of the potential social benefit of crowdsourced shipping.

We start the numerical experiments with small-scale networks with graphs of 25 nodes. Two different spatial distributed sets with 25 nodes generated from the Solomon’s benchmark problem R101 are considered: the scattered set and the clustered set. In particular, customer locations 26-50 are used to generate the scattered set, while customer locations 76-100 are used to generate the clustered set. The scattered set nicely represents the characteristics of the evenly-distributed cities, while the clustered set represents a network with city clusters. We multiply the coordinations of these nodes by 3, resulting in an area of 210×210 kilometers (roughly the size of the Netherlands) and connect them by generating the Delaunay graph (Delaunay, 1934) for the two sets of 25 nodes. A Delaunay graph for a set of nodes in a plane is a graph such that no node is inside the circumcircle of any triangle in the graph. It is a geometric spanner with the best upper bound known, that is, the shortest path between any two nodes, along Delaunay edges, is known to be no longer than $\frac{4\pi}{3\sqrt{3}} \approx 2.418$ times the Euclidean distance between them. This property can be exploited to compute shortest paths efficiently, which allows us to focus on the efficiency of the main operations such as the time to compute a match and the time to add an offer. The Delaunay graph is also used to construct road networks on given sets of nodes by Vckovski et al. (1999), Baccelli et al. (2000) and Liu (2014). The resulting graphs are depicted in Figure 5.

The Euclidean distance is used to calculate the distances between the connected nodes. The average speed of the drivers is assumed to be 60km/h. Each driver’s earliest departure time is uniformly

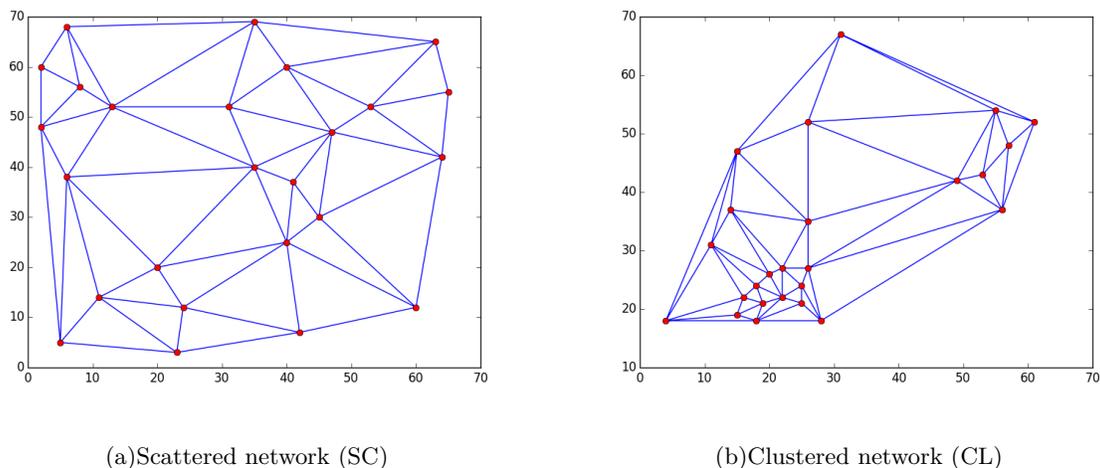


Figure 5 The two networks used in smaller-scale test problems

distributed between 0 and 120 (representing the time window between 8am and 10am); his/her latest arrival time is the summation of the corresponding earliest arrival time plus a time slack. Any time slack is assumed to be dependent on the associated driver's shortest travel distance r_q . We assign a time slack of 30 minutes to the driver who has the shortest shortest path and a time slack of 120 to the driver who has the longest shortest path. For the rest of the drivers, the corresponding time slack is calculated proportionally based on the length of his/her shortest path. These numbers are reasonable regarding the network used in the experiment. A driver's car capacity for parcels is assumed to be an integer uniformly distributed between 5 and 10 units, and a parcel's volume is an integer varying between 1 and 4 units with equal probability. As a benchmark, we assume that the earliest departure time and the latest arrival time are 0 and 450 for all the parcels; representing the time window between 8am and 5pm. This policy can be related to the next-day delivery service, as all the parcels have to be ready at the beginning of the day and delivered by the end of the day.

In order to study how parcels' time windows affect the matching performance, we also consider two variations of the parcels' time windows under the dependent time slack assumption, the main difference being the earliest departure time of the parcels. In the case of half-day time windows, the earliest departure time is randomly generated between 0 and 180 for all the parcels, which is equivalent to being ready by noon. It can be related to the same-day delivery service. We also consider the case of 3-hour time windows, where the earliest departure time is randomly generated between 0 and 270. The corresponding maximum time duration is the maximum between 3 hours and the time needed for the parcel to be delivered to the destination through its shortest path, as it is simply impossible for some of the parcels to be delivered within the 3-hour time window, especially those in

remote areas. These numbers are chosen to ensure that the parcel departing at the upper bound of the time window can be delivered on the same day.

The value of the cost parameters that are used in the experiments are inspired by the real life situation in the Netherlands. They are as follows. The cost c_p for same-day delivery of a parcel by the shipping company is given by $20 + 0.1 \times SP$ euros, where SP is the shortest distance between the parcel’s origin and destination. This results in an average tariff of approximately 30 euros in our networks (35.5 and 27.8 euros for the scattered and clustered networks, respectively), which corresponds to the tariffs for same-day delivery and 12-hour emergency shipments charged by the major Dutch shipping companies for lightweight ($\leq 5\text{kg}$) parcels. A driver’s average cost of driving a car in the Netherlands, taking into account gas, taxes and insurance is about 0.30 €/km. We assume that the drivers are compensated for 30% of the total travel cost on the routes where they carry at least one parcel. Thus, $w_1 = 0.09$ €/km. Note that the compensation is additive if multiple parcels are carried simultaneously. The cost of transferring a parcel between drivers is €2 (€1 for each driver), i.e., $w_2 = 2$. We further assume that the cost of a driver waiting on the way is 10 €/hour, i.e., $w_3 = 0.167$ €/min. Since the time spent on detour is compensated by w_3 , $w_4 = 0.3$ €/km is used to compensate the additional travel cost due to detours.

In order to understand the efficiency of integrating crowdshipping in a more realistic setting, we consider a case that might be faced by a shipping company operating in the Netherlands using the proposed heuristics. The network used in this more realistic case consists of 39 big cities in the Netherlands. Each city is represented by a node on the graph. We assume that transfers can only happen in the cities. All crossings/mergings of the roads within a 5-kilometer radius of each city center are also assumed to be located at the city center as a potential transfer point. The edges between each city pair represent the travel route chosen by Google Maps under the criteria of shortest driving time. The resulting graph is depicted in Figure 6.

7. Numerical results

Test instances are solved on an Intel Core i7-4790 3.60GHz, CPU 8 GB RAM computer. The ILP is solved by using the standard CPLEX 12.4 MIP solver in AIMMS. The TC-heuristic is implemented using Delphi XE7. In order to take advantage of existing open-source libraries and frameworks to build the time-expanded graph structure, the TEG-heuristics (i.e., TEG, CR-TEG and R-TEG) are implemented in Java. Statistically, Delphi XE6 is found to be at least 3 times as fast as Java (Arudchelvam et al., 2013; Karaci, 2015). Due to the performance gap between the two compilers in terms of run time, our analysis of the performance of the two heuristics concerning run time will focus on the increments rather than the absolute values.

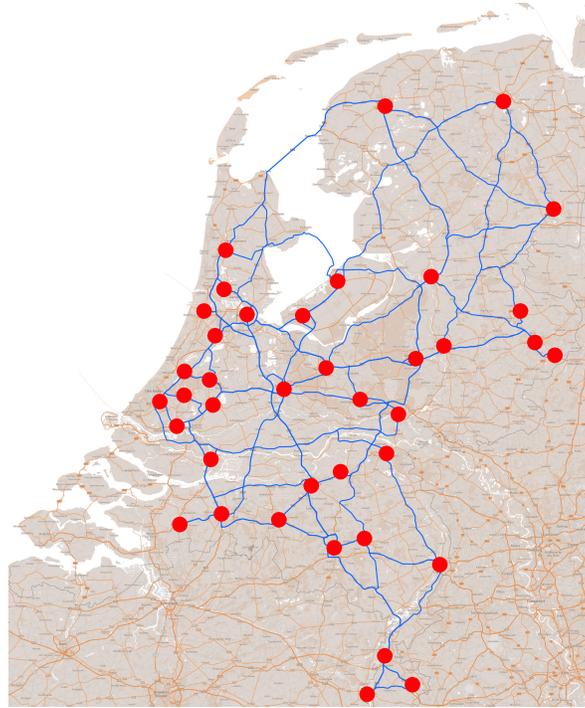


Figure 6 The network used in the realistic case

Sections 7.1 and 7.2 study the features of the MDMPMP based on the optimal solution for different scenarios. A scenario refers to a problem setting with respect to the number of drivers and parcels, the maximum allowed detour, the set of delivery windows, and a certain network, the results of which are averaged over 10 instances. Section 7.1 analyzes the impact of crowdsourced shipping in different spatial distributions of the network from different stakeholder’s viewpoints. Section 7.2 highlights the influence of the planning horizon. In Section 7.3, we compare the performance of the two proposed heuristics. In Section 7.4, we study the more realistic case.

7.1. Results of the ILP

In this subsection, we illustrate the performance of the ILP with different maximum detours and different number of drivers and parcels, the results of which are compared with the current situation where all the parcels are delivered by the shipping company. Figure 7 presents the total costs with varying maximum detour δ for 15 drivers and 30 parcels. The total cost of the default situation provides an upper bound of the driver-parcel matching system; the total cost obtained by the ILP provides the best lower-bound. As δ increases, more parcels can be delivered by the crowd, at the expense of increasing travel distances, which becomes a source of CO₂ emission and traffic flow. A higher driver participation could be a socially responsible alternative, given that the drivers who participate in this problem need to travel anyway. Besides, Figure 8 shows its economic viability.

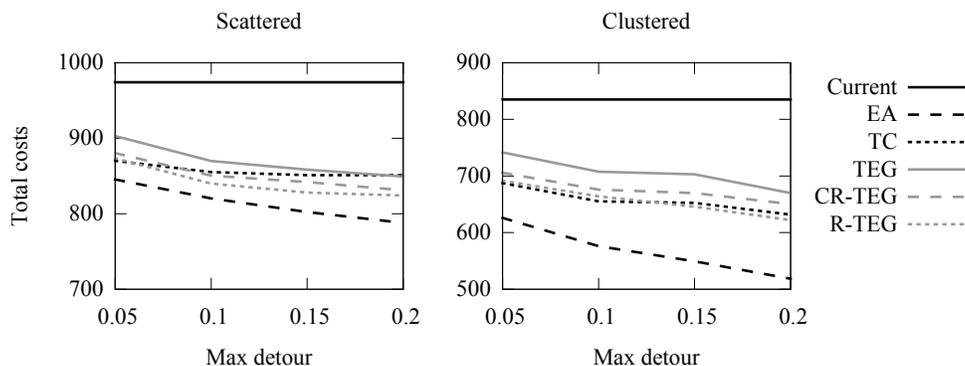


Figure 7 The impact of maximum detour on total cost ($\#driver = 15$, $\#parcel = 30$)

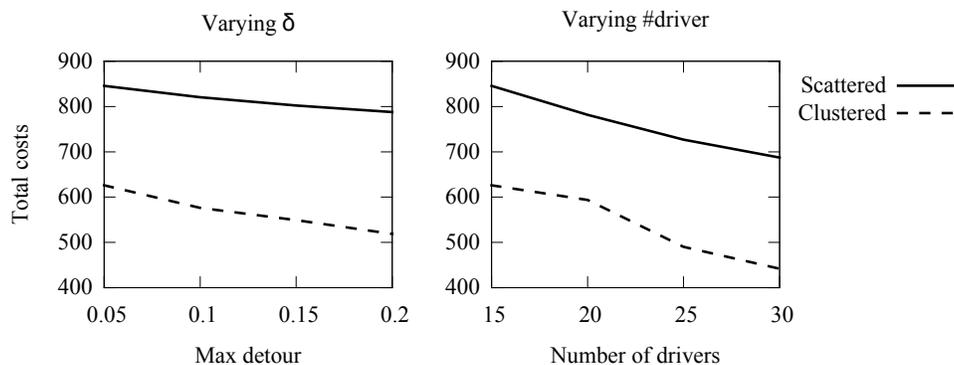


Figure 8 The comparison of varying δ given $\#driver = 15$, and varying $\#driver$ given $\delta = 0.05$

In order to illustrate the ideas in a transparent manner, the results of varying δ in Figure 8 is a reorganization of the results obtained by the ILP in the scattered and clustered networks that are shown in Figure 7. Starting from the benchmark case of $\#driver=15$, $\#parcel=30$ and $\delta = 0.05$, it compares the total cost of 15 participating drivers at $\delta = 0.05, 0.1, 0.15, 0.2$, and the total cost of 15, 20, 25, and 30 participating drivers who are willing to deviate at $\delta = 0.05$. The total cost is plotted as a function of δ and $\#driver$, respectively. In the scattered network (SC), we find that the total cost function of $\#driver$ always has a steeper slope. Since we start from the same benchmark case, this means that the total cost of having 5 additional participating drivers is always lower than a 5 percentage points increase in the driver's willingness to deviate from their shortest path; the difference is increasing with increasing $\#driver$ and δ . Such a cost advantage does not always exist in the clustered network (CL).

Tables 2 and 3 report on the numerical results with varying number of drivers and parcels using a maximum detour of 10%. Table 2 shows that the total cost decreases with increasing number of drivers, because the parcels can be delivered by the most appropriate driver(s) among a larger pool

of them. Table 3 shows that the total cost increases with increasing number of parcels, because more parcels need to be delivered. Moreover, increasing number of drivers and parcels are both more socially desirable since the overall cost efficiency of the assigned parcels and drivers increases with increased number of parcels and drivers in the candidate pool. In order to present some joint observations in Tables 2 and 3, we define the driver-parcel (DP) ratio, the ratio between the number of drivers and the number of parcels. It seems to suggest the existence of a critical DP ratio (1 in SC and 0.33 in CL), below which, the percentage cost saving remains stable. Although the potential cost saving from the crowd is relatively robust in this case, the overall vehicle-miles traveled constantly increases. This is because more suitable parcels among a relatively larger parcel pool can be assigned to the crowd. Fleet consolidation leads to a significant reduction in overall vehicle-miles traveled, and thus reduced CO₂ emission and traffic congestion. Above the critical DP ratio, the percentage cost saving increases as the DP ratio increases, which results from assigning parcels to more suitable drivers among a relatively larger driver pool. Note that this increased driver-parcel ratio can be translated into either an increased number of drivers or a decreased number of parcels. Although the maximum extra travel time (the average over the maximum values of each instance) for a driver varies from 6.5 to 17.8 minutes, the average extra time is less than 4 minutes for all the scenarios. Based on the basic results presented in Table 3, 9 studies the correlation between capacity utilization and vehicle miles saved, both resulting from varying the number of parcels. It suggests that a positive correlation exists between the vehicle miles saved and the capacity utilization, and the correlation coefficient is larger in SC.

Table 2 The exact solutions by varying the number of drivers ($\#parcel = 15, \delta = 0.1$)


Network	# driver	DP ratio	total cost			extra travel time (min)		avg. cap. utilization	match rate	#hops			mile saved
			EA	current	saving	max	mean			max	min	mean	
SC	15	1.00	404.1	489.9	17.5%	6.5	0.8	0.08	0.30	1.8	0	0.01	405.3
	30	2.00	303.3	487.9	37.8%	15.8	1.5	0.10	0.67	2.9	0	0.02	1091.9
	45	3.00	374.3	494.5	44.3%	17.3	0.9	0.07	0.78	2.7	0	0.02	1375.5
CL	15	1.00	276.0	423.0	34.8%	11.2	1.6	0.13	0.50	1.4	0	0.6	445.2
	30	2.00	191.3	413.1	53.7%	13.1	1.3	0.10	0.75	2.6	0	0.9	731.6
	45	3.00	142.9	416.7	65.7%	7.8	0.3	0.09	0.91	3.8	0	1.2	998.5

We observe that the cost performance and the match rate in CL is better than in SC. For instance, given the same number of drivers and parcels, the average cost reduction in CL is about 70% higher than in SC. The match rate in CL can reach 91%, when the DP ratio is 3. The average number of hops for a parcel to reach its destination is also larger in CL. These phenomena can be explained by the

Table 3 The exact solutions by varying the number of parcels ($\#driver = 15, \delta = 0.1$)

Network	# parcel	DP ratio	total cost			extra travel time (min)		avg. cap. utilization	match rate	#hops			mile saved
			EA	current	saving	max	mean			max	min	mean	
			SC	15	1.00	404.1	489.9	17.5%	6.5	0.8	0.08	0.30	1.8
	30	0.50	820.3	974.7	15.8%	14.6	2.2	0.15	0.27	2.7	0	0.01	758.6
	45	0.33	1209.9	1455.8	16.9%	15.6	2.9	0.22	0.30	3.1	0	0.02	1382.1
	60	0.25	1606.7	1953.4	17.8%	17.8	3.7	0.31	0.31	3.0	0	0.03	1784.5
	75	0.20	2095.2	2475.8	15.4%	16.8	3.2	0.33	0.27	3.5	0	0.03	2075.8
	90	0.17	2490.6	2915.5	14.6%	15.8	2.9	0.38	0.25	3.0	0	0.03	2190.1
CL	15	1.00	276.0	423.0	34.8%	11.2	1.6	0.13	0.50	1.4	0	0.6	445.2
	30	0.50	553.6	835.4	33.8%	12.8	2.6	0.25	0.48	2.9	0	0.5	916.6
	45	0.33	936.3	1271.5	26.4%	11.4	2.8	0.25	0.37	3.8	0	0.4	1006.7
	60	0.25	1233.3	1662.7	25.9%	14.1	3.1	0.32	0.36	5.1	0	0.4	1175.5
	75	0.20	1580.0	2099.1	24.7%	13.9	3.2	0.41	0.35	6.5	0	0.4	1646.8
	90	0.17	1879.3	2531.0	25.8%	13.4	3.8	0.46	0.37	7.6	0	0.4	1924.6

fact that the majority of drivers' and parcels' origins and destinations are close to each other within the clusters, leading to a denser subgraph consisting of drivers' possible paths for these parcels. We also find that different key parameters in SC and CL have a different effect on the total cost. For instance, the maximum allowed detour has more impact on the total cost in CL (see Figure 7), while the total cost in SC reacts stronger to increasing car capacity utilization (see Figure 9). In addition, implementing crowdsourced shipping saves more vehicle miles in SC in 6 out of the 8 scenarios. This is mainly because SC is more geographically spanned, that is, the average distance between any two nodes in SC is about 48% longer than in CL. The vehicle miles saved is larger in CL only when its match rate is significantly higher, i.e., the DP ratio between 0.5 and 1 in Figure 10).

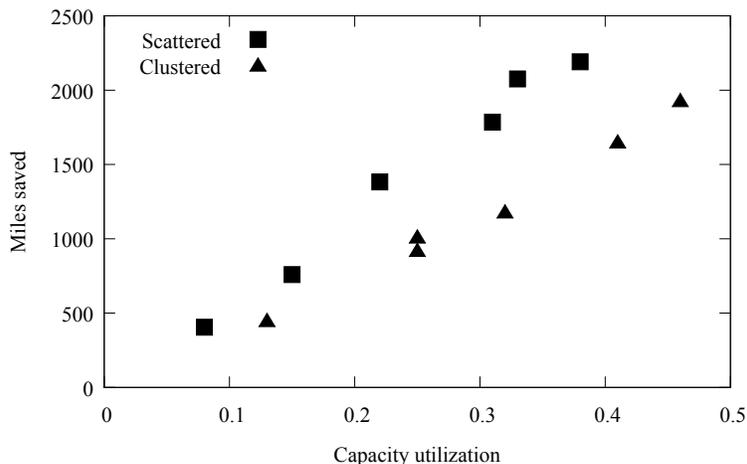**Figure 9** Impact of driver's capacity utilization on the miles saved

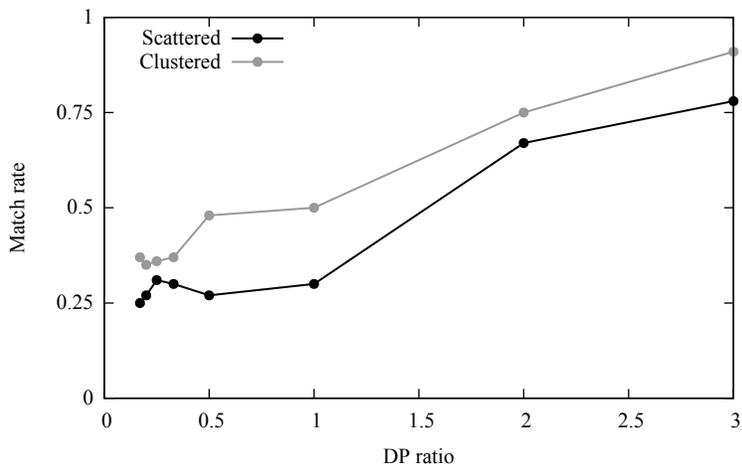


Figure 10 Impact of the DP ratio on the match rate

7.2. Impact of delivery time windows

The same-day delivery option is rare and expensive in the Netherlands. The goal of this subsection is to show that by using crowdsourced shipping, a shipper can provide affordable same-day delivery services to its customers.

Tables 4 and 5 provide a summary of the results obtained under different delivery options, including next-day delivery, same-day delivery, and 3-hour emergency delivery services. We observe similar trends of the cost reduction and the match rate in the same-day delivery and the 3-hour delivery service by varying the number of parcels and drivers. In Table 5, although the delivery window in the same-day delivery is only 1.5 hours less on average compared to the next-day delivery, the cost saving drops 4.7% (7.9%) on the SC (CL), which is 1.2 (1.4) times more than the cost saving reduction from the same-day delivery to the 3-hour delivery service. This seems counter-intuitive at first glance. However, it can be explained by the fact that the shipper mainly use the morning commute (8-10am) of the crowd to deliver parcels, yet the parcels that are delivered via the same-day delivery option are ready at 9:30am on average. It results in a drastic decrease in available drivers. Therefore, it is important for the shipper to fully understand the feature of the crowd’s schedule and select the delivery options that are compatible with crowdsourced shipping. Otherwise, the shipper may lose not only the benefit of crowdsourced shipping but also the opportunity of in-house resource consolidation. Tables 4 and 5 also show that if crowdsourced shipping can be efficiently implemented, faster delivery service options can be provided with lower costs.

7.3. Performance of the algorithms

In this subsection, we illustrate the computational performance of both the TC-heuristic and the TEG-heuristic in the small-scale numerical setting with different maximum detours as well as different

Table 4 Results under different delivery options varying the number of drivers ($\delta = 0.1$)

Network	#driver	#parcel	Current	Cost saving (%)			Match rate		
				Next day	Same day	Urgent	Next day	Same day	Urgent
SC	15	15	489.9	17.6	12.2	8.9	0.30	0.21	0.15
	30		487.9	37.8	33.3	23.9	0.67	0.56	0.37
	45		494.5	44.3	33.9	21.4	0.78	0.57	0.35
CL	15	15	423.0	34.8	26.8	18.8	0.50	0.39	0.27
	30		413.1	53.7	33.9	30.4	0.75	0.59	0.42
	45		416.7	65.7	55.3	34.5	0.91	0.76	0.47

Table 5 Results under different delivery options varying the number of parcels ($\delta = 0.1$)

Network	#driver	#parcel	Current	Cost saving (%)			Match rate		
				Next-day	Same-day	3-hour	Next-day	Same-day	3-hour
SC	15	15	489.9	17.6	12.2	8.9	0.30	0.21	0.15
		30	974.7	15.9	11.6	7.9	0.27	0.20	0.13
		45	1455.8	16.9	13.1	8.4	0.30	0.23	0.14
		60	1953.4	17.8	12.3	8.0	0.31	0.22	0.13
		75	2475.8	15.4	10.7	6.8	0.27	0.19	0.11
		90	2915.5	14.6	10.4	7.5	0.25	0.18	0.12
CL	15	15	423.0	34.8	26.8	18.8	0.50	0.39	0.27
		30	835.4	33.8	23.1	17.9	0.48	0.33	0.25
		45	1271.5	26.4	19.1	14.8	0.37	0.27	0.21
		60	1662.7	25.9	18.2	12.6	0.36	0.25	0.18
		75	2099.1	24.7	19.9	12.7	0.35	0.28	0.18
		90	2531.0	25.8	16.9	12.6	0.37	0.25	0.18

number of drivers and parcels, the results of which are compared with the exact solution, and the current situation where all the parcels are delivered by the shipping company.

Compared to the exact solution given by the ILP, the optimality gap varies between 2.9% (2.5%) and 49.9% (39.4%) for the TC (TEG) heuristic. Based on the percentage difference from the exact solution, Figures 11 and 12 depict the quality of the solutions obtained by the TC, TEG, CR-TEG and R-TEG heuristics by varying the number of parcels and drivers. Given a fixed number of drivers (i.e., $\#driver = 15$), Figure 11 shows that the performance of every solution method is robust to changes in the number of parcels, compared to the best possible practice. This means that as the number of parcels increases, the percentage difference between the solution obtained by a certain heuristic and the exact solution obtained by solving the ILP does not vary a lot. In contrast, the heuristics perform less with increasing number of drivers (see Figure 12). This is mainly due to the neglect of the increasing number of possible paths for the drivers, as the previous analysis has shown that the number of drivers is a dominant source of the computational complexity. Even so, all the proposed heuristics can be used to obtain a solution that performs much better than the current situation. Arguably, the R-TEG heuristic outperforms the other methods in all these scenarios and

its deterioration rate is the lowest among the four heuristics, as the number of drivers increases. The above results are computed using a maximum detour of 0.1. Interestingly, as seen before, Figure 7 shows that when δ is small, the TC-heuristic performs better than the three TEG heuristics, but it gets behind quickly as either the number of drivers or the maximum detour increases. This demonstrates the fact that when the subgraph that is constructed by drivers' possible paths becomes better connected, the number of potential transfers for each parcel increases. As such, not being able to wait at transfer points becomes the most influential adverse factor that affects the quality of the solution. Figure 13 also shows that the TEG approaches perform consistently well as the maximum detour increases.

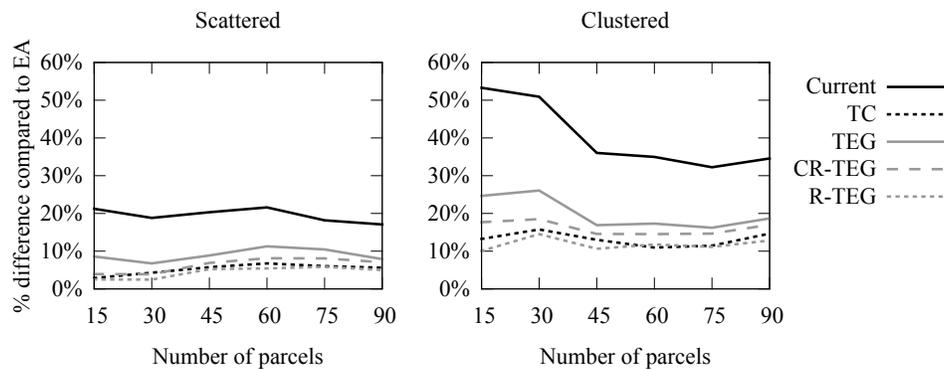


Figure 11 Impact of the number of parcels, compared to the exact solutions

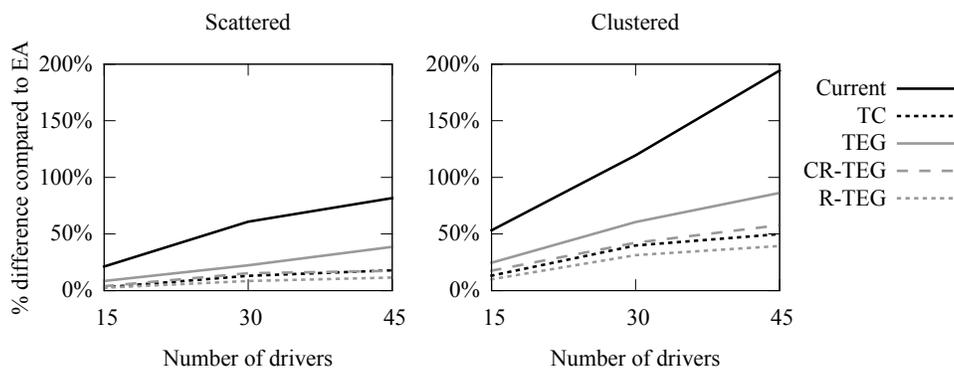


Figure 12 Impact of the number of drivers, compared to the exact solutions

The run time of each solution method spent in solving the different scenarios is summarized in Tables 6 and 7. We see that the number of drivers is a major source of computational complexity, compared to the number of parcels. For each instance, the CR-TEG and the R-TEG heuristics run

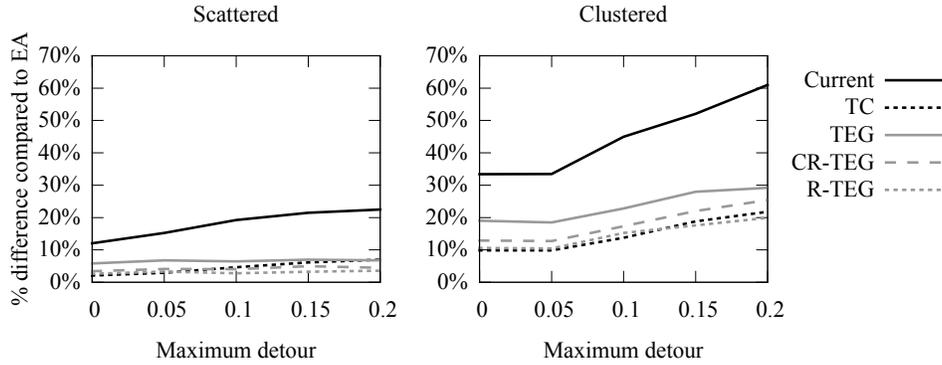


Figure 13 Impact of δ , compared to the exact solutions

for 100 iterations and 1000 iterations, respectively. Obviously, these two heuristics achieve a better solution at the cost of having a 100-1000 times longer run time. Therefore, we study the number of iterations needed for CR-TEG (R-TEG) to achieve a certain percentage improvement on the gap between the TEG objective and the objective of the CR-TEG (R-TEG) after 100 (1000) iterations. The results of using $\#driver = 15$, $\#parcel = 90$, $\delta = 0.1$ are shown in Figure 14. We see that the CR-TEG heuristic reaches 90% improvement after 8 iterations in SC and after 10 iterations in CL. The R-TEG heuristic obtains 90% improvement after 98 iterations in SC and after 23 iterations in CL. We also studied the other scenarios and found similar patterns. The fast convergence of the heuristics shows the added value of using even more iterations is limited.

Table 6 Summary of the run time by varying the number of drivers ($\delta = 0.1$)


Network	#driver	#parcel	run time (sec)				EA
			TC	TEG	CR-TEG	R-TEG	
SC	15	15	0.006	0.003	1.255	2.813	1.846
	30		0.028	0.007	2.191	6.604	2367.392
	45		0.029	0.010	2.869	9.688	12852.460
CL	15	15	0.006	0.005	1.925	5.385	28.355
	30		0.019	0.011	3.177	11.103	4610.559
	45		0.032	0.019	4.019	18.515	16539.498

7.4. Realistic case

In this subsection, we solve a larger-scale problem setting that a Dutch shipping company might face when using crowd based shipping within the Netherlands using the proposed heuristics. We compare the efficiency of each heuristic and also compare the results with the default scenario that the shipper delivers all the parcels itself. Our goal is two-fold. First, we want to show that the proposed heuristics

Table 7 Summary of the run time by varying the number of parcels ($\delta = 0.1$)

Network	#driver	#parcel	run time (sec)				
			TC	TEG	CR-TEG	R-TEG	EA
SC	15	15	0.006	0.003	1.255	2.813	1.846
		30	0.008	0.004	1.514	3.878	30.873
		45	0.011	0.006	2.249	6.381	88.961
		60	0.006	0.007	2.351	7.090	37.831
		75	0.014	0.006	2.062	6.326	196.111
		90	0.016	0.008	2.577	8.115	76.930
CL	15	15	0.006	0.005	1.925	5.385	28.355
		30	0.014	0.008	2.550	8.137	1627.549
		45	0.019	0.009	3.019	8.649	3130.300
		60	0.015	0.009	2.959	9.227	4391.117
		75	0.019	0.011	3.190	11.388	22442.349
		90	0.020	0.011	3.405	11.345	7008.197

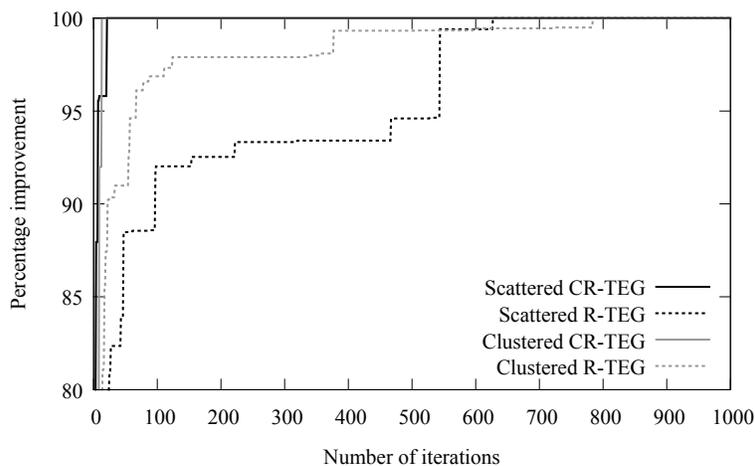**Figure 14** Convergence speed of the CR-TEG and R-TEG heuristics

are capable of solving real life problems in reasonable run time. Second, the MDMPMP could be an economically sound alternative for a shipper, and can lead to socially desirable results.

Since the number of drivers is a major source of computational complexity, we consider scenarios with 300 parcels and varying number of drivers ranging between 100 and 900. The results are shown in Table 8. As explained at the beginning of Section 7, we focus on the increments rather than the absolute values concerning the run times. We see that the run time of the TC heuristic increases super-linearly with respect to the number of drivers, whereas the run time of the TEG-typed heuristics increases linearly. For the largest scenario that we test (i.e., 900 drivers, 300 parcels, 0.1 maximum detour and 3-hour delivery window), the use of the TC (TEG) heuristic leads to 53.4% (38.5%) average reduction in the overall cost compared to the default shipping option, with a run time of 43.9 (3.2) seconds. There is almost no impact on the run time between the next-day delivery and the

same-day delivery, but we see a run time increment between the same-day delivery and the urgent delivery for the scenario of 900 drivers.

As the problem scale increases, the CR-TEG outperforms the R-TEG in both quality and run time. Due to the substantial increase in the solution space, the CR-TEG has a steeper and more steady descent by fixing the existing parcel-driver assignments. Similar to a random walk, the R-TEG is better at escaping from a local minimum and achieve better solutions in principle, but the limited number of iterations compared to the solution space becomes a barrier. Furthermore, the impact of shortening the time window has the least impact on the CR-TEG, mainly because the solution is obtained based on an initial solution where drivers are considered to depart at the earliest departure time.

To conclude, we recommend the CR-TEG heuristic for the larger-scale problems based on its overall performance with respect to quality and run time.

Table 8 Results of a realistic case under different delivery options (#parcel=300, $\delta = 0.1$)

Delivery option	# driver	Relative difference in objective value compared to current				Run time (sec)			
		TC	TEG	CR-TEG	R-TEG	TC	TEG	CR-TEG	R-TEG
Next-day	100	16.9%	11.4%	12.5%	13.6%	2.045	0.171	12.275	34.127
	300	46.9%	25.3%	29.4%	29.2%	9.738	0.993	65.736	198.648
	500	52.1%	34.2%	39.0%	38.1%	15.656	1.839	101.066	367.745
	700	53.2%	39.0%	42.2%	42.4%	28.938	2.723	167.474	544.695
	900	53.4%	38.5%	40.4%	39.3%	43.878	3.220	131.794	643.949
Same-day	100	15.3%	9.7%	11.3%	11.7%	1.735	0.173	12.254	34.585
	300	40.2%	22.6%	27.2%	27.4%	9.482	0.925	60.059	184.925
	500	49.2%	29.2%	37.4%	34.8%	17.545	1.769	100.447	353.868
	700	52.0%	32.3%	42.7%	39.1%	29.717	2.565	144.293	512.900
	900	52.2%	33.4%	43.8%	38.7%	46.388	3.320	144.990	664.015
Urgent	100	13.5%	7.8%	9.7%	10.8%	1.391	0.172	11.115	34.466
	300	30.5%	17.2%	23.1%	22.2%	9.377	1.021	67.539	204.139
	500	37.2%	22.5%	31.7%	29.3%	21.043	1.523	114.407	304.521
	700	42.0%	24.8%	36.5%	36.0%	37.027	3.324	167.370	664.809
	900	43.2%	25.2%	39.4%	32.5%	60.435	4.510	231.232	901.989

Note: Due to the increase of run time, 50 iterations are applied to the CR-TEG and 200 iterations are applied to the R-TEG.

8. Conclusion

In this paper, we consider the problem where a shipper (or a consortia of shippers) uses crowdsourced shipping for home deliveries of small-to-medium freight volumes. In particular, we take advantage of the spare capacity in the private vehicles from crowdsourced drivers along their scheduled trips.

We provide a general ILP formulation for the multi-driver multi-parcel matching problem, which can be viewed as an extension of the multi-hop ride sharing problem. The model incorporates driver’s maximum allowed detour, vehicle capacities, and the option of transferring parcels between drivers.

Due to the high computational complexity of the problem, the ILP can be solved to optimality only for small instances. This motivates us to develop two heuristics: the time compatibility heuristic and the time-expanded graph heuristic. The time compatibility heuristic assigns each parcel to the shortest feasible path on a network that consists of drivers’ possible physical paths, yet checking the time compatibility for each step can be computationally costly. The time-expanded graph heuristic uses an approach that is typically used to model timetable information in public transportation where the routes and schedules are usually predetermined. The most differentiating feature of the two approaches is whether the decision on a driver’s route and the corresponding time schedule affects the feasibility of another driver’s decision. We explain the pros and cons of both heuristics and provide an extensive experimental comparison of the two approaches.

Assuming the participating drivers need to travel anyway, the numerical results show that an increasing number of participating drivers is beneficial for the shipper, and socially desirable due to reduction in CO₂ emissions and traffic congestion. In addition, the results suggest that it is desirable to analyze the characteristics of the system before implementing a crowdsourced shipping service. For instance, the spatial characteristics of the logistical network, and the spatial distribution of the origin and destination of the participating drivers and parcels can affect the performance of the matching system as well as the response to key parametric changes. Finally, we show that the TC-heuristic performs well in the small-to-medium sized problems, while the CR-TEG is recommended for larger-scale problems.

Future research can be done in three lines. First, future work can be done in finding a search direction regarding the choice of departure time that gives a faster convergence for the TEG approach. Second, as an extension towards a semi-online model environment, a rolling-horizon approach can be introduced. Finally, a shipping company may consider to collaborate with companies that provide storage services (e.g., locker systems) at convenient locations, which can loosen the time synchronization restriction among drivers and parcels.

Acknowledgments

This research is partially funded by Dinalog, the Dutch Institute for Advanced Logistics, as part of the R&D project CargoHitching.

References

- Agatz, Niels, Alan Erera, Martin Savelsbergh, Xing Wang. 2012. Optimization for dynamic ride-sharing: A review. *European Journal of Operational Research* **223**(2) 295–303.
- Arslan, Alp, Niels Agatz, Leo G. Kroon, Rob A. Zuidwijk. 2016. Crowdsourced delivery – a pickup and delivery problem with ad-hoc drivers. Working paper, Erasmus University Rotterdam.
- Arudchelvam, Thiruchelvam, J Wijekulasooriya, S Ratnajeevan H Hoole. 2013. Comparison of performance of finite element codes in different programming languages converted from legacy finite element codes. *3rd International Conference on Electrical, Computer, Electronics & Biomedical Engineering (ICECEBE'2013)*. 29–30.
- Baccelli, François, Konstantin Tchoumatchenko, Sergei Zuyev. 2000. Markov paths on the poisson-delaunay graph with applications to routing in mobile networks. *Advances in Applied Probability* 1–18.
- Barr, Alistair, Jessica Wohl. 2013. Exclusive: Wal-mart may get customers to deliver packages to online buyers. URL <http://www.reuters.com/article/us-retail-walmart-delivery-idUSBRE92R03820130328>.
- Delaunay, B. 1934. Sur la sphere vide. a la memoire de george voronoi.
- Draws, Florian, Dennis Luxen. 2013. Multi-hop ride sharing. *Sixth Annual Symposium on Combinatorial Search*.
- Fatnassi, Ezzeddine, Jouhaina Chaouachi, Walid Klibi. 2015. Planning and operating a shared goods and passengers on-demand rapid transit system for sustainable city-logistics. *Transportation Research Part B: Methodological* **81** 440–460.
- Ghilas, V., E. Demir, T. Van Woensel. 2013. Integrating passenger and freight transportation: Model formulation and insights. Working paper, Technische Universiteit Eindhoven.
- Gruebele, Philip A. 2008. Interactive system for real time dynamic multi-hop carpooling. *Global Transport Knowledge Partnership* .
- Herbawi, Wesam, Michael Weber. 2011. Evolutionary multiobjective route planning in dynamic multi-hop ridesharing. *Evolutionary Computation in Combinatorial Optimization*. Springer, 84–95.
- Herbawi, Wesam, Michael Weber. 2012. The ridematching problem with time windows in dynamic ridesharing: A model and a genetic algorithm. *Evolutionary Computation (CEC), 2012 IEEE Congress on*. IEEE, 1–8.
- IPCC. 2014. Mitigation of climate change. contribution of working group iii to the fifth assessment report of the intergovernmental panel on climate change. URL https://www.ipcc.ch/pdf/assessment-report/ar5/wg3/ipcc_wg3_ar5_full.pdf.

- ITF. 2010. Reducing transport greenhouse gas emissions: trends and data. URL <http://www.internationaltransportforum.org/Pub/pdf/10GHGTrends.pdf>.
- Karaci, Abdulkadir. 2015. A performance comparison of c# 2013, delphi xe6, and python 3.4 languages. *International Journal of Programming Languages and Applications* **5**(3).
- Li, Baoxiang, Dmitry Krushinsky, Hajo A Reijers, Tom Van Woensel. 2014. The share-a-ride problem: People and parcels sharing taxis. *European Journal of Operational Research* **238**(1) 31–40.
- Lindholm, Maria, Sönke Behrends. 2012. Challenges in urban freight transport planning—a review in the baltic sea region. *Journal of Transport Geography* **22** 129–136.
- Liu, Chun. 2014. *Principle and application progress in location-based services*. Springer.
- Masson, Renaud, Anna Trentini, Fabien Lehuédé, Nicolas Malhéné, Olivier Péton, Houda Tlahig. 2014. Optimization of a city logistics transportation system with mixed passengers and goods. *EURO Journal on Transportation and Logistics* 1–29.
- Montreuil, Benoit. 2011. Toward a physical internet: meeting the global logistics sustainability grand challenge. *Logistics Research* **3**(2-3) 71–87.
- Nguyen, Ngoc-Quang, Nguyen-Viet-Dung Nghiem, Phan-Thuan DO, Khac-Tuan LE, Minh-Son Nguyen, Naoto MUKAI. 2015. People and parcels sharing a taxi for tokyo city. *Proceedings of the Sixth International Symposium on Information and Communication Technology*. ACM, 16.
- Prologis. 2015. European e-commerce, e-fulfilment and job creation.
- Reilly, Dan. 2015. Amazon ponders crowdsourcing deliveries with 'on my way' program. URL <http://fortune.com/2015/06/16/amazon-crowd-source/>.
- Schrank, David, Bill Eisele, Tim Lomax, Jim Bak. 2015. 2015 urban mobility scorecard. URL <http://d2dt15nnlpfr0r.cloudfront.net/tti.tamu.edu/documents/mobility-scorecard-2015.pdf>.
- Shen, Jinxing, Feng Qiu, Wenquan Li, Peiyu Feng. 2015. A new urban logistics transport system based on a public transit service. *15th COTA International Conference of Transportation Professionals*.
- Trentini, Anna, Nicolas Mahléné. 2010. Toward a shared urban transport system ensuring passengers & goods cohabitation. *Tema. Journal of Land Use, Mobility and Environment* **3**(2).
- Vckovski, Andrej, Kurt E Brassel, Hans-Jörg Schek. 1999. *Interoperating Geographic Information Systems: Second International Conference, INTEROP'99, Zurich, Switzerland, March 10-12, 1999 Proceedings*. 1580, Springer Science & Business Media.